

**ROCKWALL COUNTY
RFP FOR CONSTRUCTION FOR CRENSHAW ROAD
EAST PROJECT**

ADDENDUM NO. 05

See revised sheets and bid proposal form attached.

Q1. Can this bid be submitted through BidNet Direct?

A. No.

Bidder Acknowledgement: _____


C-3 Summary of Quantities

ITEM NO.	QUANT.	UNIT	DESCRIPTION	ITEM NO.	QUANT.	UNIT	DESCRIPTION	ITEM NO.	QUANT.	UNIT	DESCRIPTION	ITEM NO.	QUANT.	UNIT	DESCRIPTION
G1	1	LS	REMOVE EXISTING 1200' x 1200' CONC. DRIVEWAY	G9	4688	SY	REMOVE AND DISPOSE OF EXISTING SIDEWALK SURFACE (Per NCTCO Item # 201.1)	P1	18,300	SY	6" UNFINISHED SANDPAC (Per NCTCO Item # 201.2)	P9	1,200	LF	METAL BEAM GUARDRAIL (Per NCTCO Item # 516)
G2	1	LS	GENERAL IMPROVEMENTS (Per NCTCO Item # 201.1)	G10	9,943	LF	BARBED WIRE FENCE (Per NCTCO Item # 515, 1200' Drive W/ 5'-10	P2	454	TON	LINK MATERIAL, 1/2" x 48, 150791 (Per NCTCO Item # 201.2)	P10	15	EA	SMOOTH CORNER (Per NCTCO Item # 504)
G3	1	LS	BASIC LOCAL TRAFFIC CONTROL (Per NCTCO Item # 201.1)	G11	11	EA	12" GATE (Per NCTCO Item # 515, 1200' Drive W/ 5'-10	P5	572	SY	5" CONCRETE DRIVEWAY (Per NCTCO Item # 201.2)	P11	36	LF	1/2" W/ 1200' S&M (Per NCTCO Item # 444 OR 844)
G4	18	EA	REMOVE EXISTING 20' x 20' SIGN (Per NCTCO Item # 201.1)	G12	1	EA	20' GATE (Per NCTCO Item # 515, 1200' Drive W/ 5'-10	P4	518	SY	1/2" CHANGED UNFINISHED GRAVEL DRIVEWAY (Per NCTCO Item # 201.2)	P12	13,569	LF	4" W/ 1200' S&M (Per NCTCO Item # 444 OR 844)
G5	1	EA	REMOVE AND RELOCATE SIGN (Per NCTCO Item # 201.1)	G13	1	EA	24" DOUBLE END VIEWING GATE SIGN (Per NCTCO Item # 201.2)	P5	17,281	SY	PRECAST CONCRETE PAVEMENT (Per NCTCO Item # 201.2)	P13	6,879	LF	4" THICK SLAB EXISTING PAVEMENT (Per NCTCO Item # 444 OR 844)
G6	4,031	LF	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	G14	10,374	CY	UNCLASSIFIED SUBJECT MATTER (Per NCTCO Item # 201.2)	P6	278	SY	22" R.F. REINFORCED CONCRETE PAVEMENT (Per NCTCO Item # 201.2)	P14	342	EA	SHAWD MANHOLE PLANT, CITY A.A. (Per NCTCO Item # 444 OR 844)
G7	228	LF	REMOVE AND RELOCATE 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	G15	13,281	CY	GRAVEL (Per NCTCO Item # 201.2)	P7	120	SY	22" R.F. REINFORCED CONCRETE SURFACE COURSE (Per NCTCO Item # 201.2)	P15	4	EA	METAL BEAM GUARDRAIL, STANDARD (12'x) (Per NCTCO Item # 516)
G8	307	SY	REMOVE AND DISPOSE OF EXISTING 4" ASPHALT (Per NCTCO Item # 201.1)					P8	322	TON	4" THICK GRAVEL PAVEMENT (Per NCTCO Item # 201.2)	P16	4	EA	GUARD RAIL DETAILMENTS (Per NCTCO Item # 514)
E1	1	LS	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	D1	135	LF	12" CURB CLASS B (Per NCTCO Item # 504.1)					P17	475	SY	4" CONCRETE DRIVEWAY (Per NCTCO Item # 412)
E2	13,449	LF	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	D2	4	EA	48" R.F. TREATMENT (14") (Per NCTCO Item # 504.1)								
E3	5,203	SY	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	D3	2	EA	36" R.F. TREATMENT (14") (Per NCTCO Item # 504.1)								
E4	31,033	SY	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)	D4	1,275	SY	12" CONCRETE (Per NCTCO Item # 504.1)								
E5	14,627	SY	REMOVE EXISTING 1200' W/ 5'-10' DRIVEWAY (Per NCTCO Item # 201.1)												

NOTE: QUANTITIES AND DESCRIPTIONS ARE PREPARED FROM THE PLANS UNDER CONSTRUCTION STANDARDS - NORTH-CENTRAL, TRADE LATEST EDITION. THE STANDARD SPECIFICATIONS FOR CONSTRUCTION AND MAINTENANCE OF HIGHWAYS, STREETS, AND BRIDGES, 2003 2ND EDITION, ARE REFERRED TO FOR THE STANDARD SPECIFICATIONS FOR CONSTRUCTION AND MAINTENANCE OF HIGHWAYS, STREETS, AND BRIDGES, 2003 2ND EDITION. QUANTITIES LISTED HERE ARE PROVIDED FOR INFORMATION PURPOSES ONLY. IN CASE REFER TO THE ORIGINAL QUANTITIES SHEET FOR THE PLAN.

CRENSHAW ROAD EAST CITY OF ROYSE CITY ROCKWALL COUNTY, TX.	SUMMARY OF QUANTITIES	PROJECT NO. 22-02557	 WSB, L.L.C. 3522 SAM RAYBURN HWY., MELISSA, TX 75454 Ph. (469) 907-5500 www.wsbeng.com
		DATE 4/28/2026	
SHEET NUMBER C-3	REGISTERED PROFESSIONAL ENGINEER THE STATE OF TEXAS UNDER THE AUTHORITY OF ANCHOR ACT, ARTICLE 12, SECTION 15.1, ACTS 1989, CH. 153 I AM NOT TO BE HELD RESPONSIBLE FOR THE CORRECTNESS OR PRECISION OF THIS INFORMATION.	REGISTRATION NO. 1-108818	NO REVISIONS DATE BY

B-4 Bridge Layout 92+50 to end

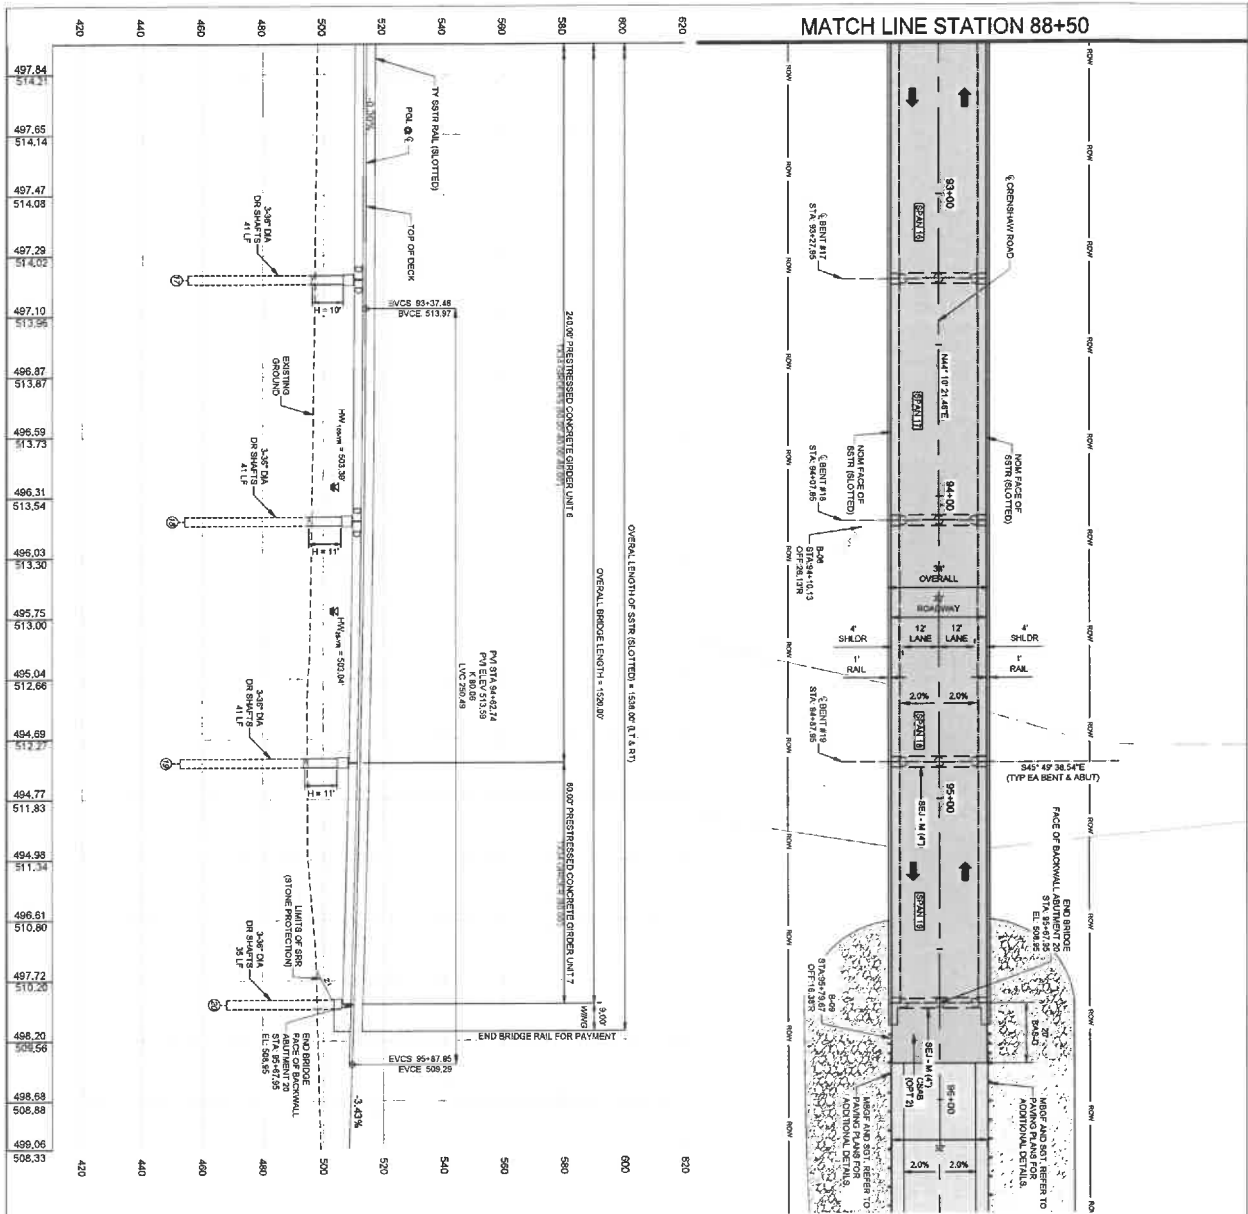

420	497.84	514.21	480	497.29	514.02	470
	497.65	514.14				
440	497.47	514.08	480	497.29	514.02	420
460	497.10	513.96				
480	496.87	513.87	480	497.10	513.96	420
500	496.59	513.73				
520	496.31	513.54	480	496.59	513.73	420
540	496.03	513.30				
560	495.75	513.00	480	495.75	513.00	420
580	495.04	512.66				
600	494.69	512.27	480	494.69	512.27	420
620	494.77	511.83				
640	494.98	511.34	480	494.98	511.34	420
660	496.61	510.80				
680	497.72	510.20	480	497.72	510.20	420
700	498.20	509.56				
720	498.58	508.88	480	498.58	508.88	420
740	499.06	508.33				
760	506.33	506.33	480	499.06	508.33	420
780						

CRENSHAW ROAD EAST CITY OF ROYSE CITY ROCKWALL COUNTY, TX.	BRIDGE LAYOUT 92+50 TO END	PROJECT NO. 22-02557	NOT FOR CONSTRUCTION THIS DRAWING IS FOR INFORMATION ONLY. THE USER ASSUMES ALL LIABILITY FOR ANY AND ALL DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS DRAWING. IF IN ANY WAY TO BE USED FOR CONSTRUCTION, THE USER MUST OBTAIN THE NECESSARY PERMITS FROM THE APPROPRIATE AGENCIES.	REGISTRATION NO. T-18849	 WSB, LLC. 3822 SAM RAYBURN HWY., MELISSA, TX, 75454 Ph. (469) 907-5500 www.wsb.com
		DATE 4/24/2026		AS SHOWN DESIGNED BY JRM CHECKED BY JRM DRAWN BY JRM DATE 4/24/2026	
SHEET NUMBER B-4				NO. REVISIONS DATE BY	

Bid Proposal Form.xlsx

SECTION E - BID PROPOSAL FORM - ATTACHMENT A						
BID PROPOSAL: CRENSHAW ROAD EAST						
COUNTY OF ROCKWALL, TEXAS						
ITEM NO.	DESCRIPTION / UNIT PRICE	SPEC. REF.	EST. QTY.	UNIT	UNIT PRICE	TOTAL AMT.
G1	Mobilization, including all necessary activities specified in 200, for protection of site, work, and existing utilities and trees in right-of-way and easements as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 200				
			1	LS	\$ -	\$ -
G2	Comprehensive Site Preparation and Protection, including all necessary activities specified in 203.1, for protection of site, work, and existing utilities and trees in right-of-way and easements as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 203.1				
			1	LS	\$ -	\$ -
G3	Barricades, Signs, and Traffic Control, including all necessary activities specified in 801.1 and TxDOT Item #502, as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 801.1, TxDOT Item #502				
			1	LS	\$ -	\$ -
G4	Remove street sign assembly, for the amount of: _____ dollars and _____ cents per each.	NCTCOG 203.1				
			18	EA	\$ -	\$ -
G5	Remove and relocate NTMWD sign, for the amount of: _____ dollars and _____ cents per each.	NCTCOG 203.1				
			1	EA	\$ -	\$ -
G6	Remove barbed wire fence, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 203.1				
			4,631	LF	\$ -	\$ -
G7	Remove and replace barbed wire fence, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 203.1				
			278	LF	\$ -	\$ -
G8	Remove existing asphalt pavement (8"), for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 203.1				
			307	SY	\$ -	\$ -
G9	Remove existing roadway surface, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 203.1				
			4,668	SY	\$ -	\$ -
G10	Barbed wire fence, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #552				
			9,943	LF	\$ -	\$ -
G11	16' gate, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #552				
			11	EA	\$ -	\$ -
G12	20' gate, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #552				
			1	EA	\$ -	\$ -
G13	24' double chain link gate to be approved by NTMWD, complete and in place for the amount of: _____ dollars and _____ cents per each.					
			1	EA	\$ -	\$ -
G14	Unclassified street excavation as specified in NCTCOG 203.2, for the amount of: _____ dollars and _____ cents per cubic yard.	NCTCOG 203.2				
			10,374	CY	\$ -	\$ -

G15	Embankment as specified in NCTCOG 203.2, for the amount of: _____ dollars and _____ cents per cubic yard.	NCTCOG 203.2	13,781	CY	\$ _____	\$ _____
P1	8" lime treated subgrade, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 301.2	18,907	SY	\$ _____	\$ _____
P2	Lime material (6% ~48 LBS/SY), complete and in place, for the amount of: _____ dollars and _____ cents per TON.	NCTCOG 301.2	454	TON	\$ _____	\$ _____
P3	6" concrete driveway, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303	577	SY	\$ _____	\$ _____
P4	3/4" crushed limestone gravel driveway, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 301	516	SY	\$ _____	\$ _____
P5	8" reinforced concrete pavement, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303	17,781	SY	\$ _____	\$ _____
P6	25' B-B 8" reinforced concrete pavement w/ curb, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303, 305.1	278	SY	\$ _____	\$ _____
P7	6" reinforced concrete surface crossing, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303, 305	120	SY	\$ _____	\$ _____
P8	8" type C HMA pavement, complete and in place, for the amount of: _____ dollars and _____ cents per TON.	NCTCOG 302	327	TON	\$ _____	\$ _____
P9	Metal beam guard fence, for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #540	1,090	LF	\$ _____	\$ _____
P10	Small street sign assembly, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #644	15	EA	\$ _____	\$ _____
P11	24" (W) stop bar, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668	30	LF	\$ _____	\$ _____
P12	4" (W) reflective pavement markings, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668	13,669	LF	\$ _____	\$ _____
P13	4" (Y)(DBL) reflective pavement markings, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668	6,829	LF	\$ _____	\$ _____
P14	Raised pavement markings TY A-A, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #666, #668	342	EA	\$ _____	\$ _____

P15	Metal beam guard fence transition (TL-2), for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #540		4 EA	\$ -	\$ -
P16	Guard rail end treatments, for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #544		4 EA	\$ -	\$ -
P17	4" concrete mow strip, for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #431, #432		476 SY	\$ -	\$ -
D1	18" CLASS III RCP, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 508.3		135 LF	\$ -	\$ -
D2	18" safety end treatment PSET-SC, complete and in place for the amount of: _____ dollars and _____ cents per each.	NCTCOG 508.3, TxDOT Item #467		4 EA	\$ -	\$ -
D3	18" safety end treatment PSET-SP, complete and in place for the amount of: _____ dollars and _____ cents per each.	NCTCOG 508.3, TxDOT Item #467		2 EA	\$ -	\$ -
D4	12" Stone Rip Rap (24" depth), complete and in place for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 808.3, TxDOT Item #432		1,775 SY	\$ -	\$ -
E1	Erosion Control and SWPPP (excluding silt fence) as specified in 202, complete and in place for the amount of: _____ dollars and _____ cents per lump sum.	NCTCOG 202		1 LS	\$ -	\$ -
E2	Installation and maintenance of Silt Fence, as specified herein, complete and in place, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 202.5		13,449 LF	\$ -	\$ -
E3	Block sodding on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.5 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.5, TxDOT Item #162		5,763 SY	\$ -	\$ -
E4	Seeded Curlex on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.6 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.6, TxDOT Item #164		31,053 SY	\$ -	\$ -
E5	Hydromulch on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.6 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.6, TxDOT Item #164		16,067 SY	\$ -	\$ -
6005	Cement stabilized backfill, complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #400		73 CY	\$ -	\$ -
6004	Drill Shaft (36") complete and in place, for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #416		2,922 LF	\$ -	\$ -
6013	Class C concrete (abutment), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420		41 CY	\$ -	\$ -

6029	Class C concrete (cap), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420	258	CY	\$ _____	\$ _____
6037	Class C concrete (column), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420	143	CY	\$ _____	\$ _____
6023	Shear key, complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #422	13	CY	\$ _____	\$ _____
6001	Reinforced concrete slab, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #422	51,680	SF	\$ _____	\$ _____
6015	Approach slab, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #422	62	CY	\$ _____	\$ _____
6036	Prestressed concrete girder (TX34), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #425	6,042	LF	\$ _____	\$ _____
6023	Rail (TY SSTR) (SLOTTED), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #450	3,076	LF	\$ _____	\$ _____
6018	Sealed expansion joint (SEJ-M) (4 IN), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #454	262	LF	\$ _____	\$ _____

TOTAL BID: \$ _____

Bid Proposal Form Addendum .pdf

SECTION E - BID PROPOSAL FORM - ATTACHMENT A						
BID PROPOSAL: CRENSHAW ROAD EAST						
COUNTY OF ROCKWALL, TEXAS						
ITEM NO.	DESCRIPTION / UNIT PRICE	SPEC. REF.	TOTAL EST.	UNIT	UNIT PRICE	TOTAL AMT.
G1	Mobilization, including all necessary activities specified in 200, for protection of site, work, and existing utilities and trees in right-of-way and easements as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 200				
			1	LS	\$ _____ -	\$ _____ -
G2	Comprehensive Site Preparation and Protection, including all necessary activities specified in 203.1, for protection of site, work, and existing utilities and trees in right-of-way and easements as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 203.1				
			1	LS	\$ _____ -	\$ _____ -
G3	Barricades, Signs, and Traffic Control, including all necessary activities specified in 801.1 and TxDOT Item #502, as designated in the project drawings, complete and in place, for the amount of: _____ dollars and _____ cents per lump sum paid out in equal payments for the duration of the project.	NCTCOG 801.1, TxDOT Item #502				
			1	LS	\$ _____ -	\$ _____ -
G4	Remove street sign assembly, for the amount of: _____ dollars and _____ cents per each.	NCTCOG 203.1				
			18	EA	\$ _____ -	\$ _____ -
G5	Remove and relocate NTMWD sign, for the amount of: _____ dollars and _____ cents per each.	NCTCOG 203.1				
			1	EA	\$ _____ -	\$ _____ -
G6	Remove barbed wire fence, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 203.1				
			4,631	LF	\$ _____ -	\$ _____ -
G7	Remove and replace barbed wire fence, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 203.1				
			278	LF	\$ _____ -	\$ _____ -
G8	Remove existing asphalt pavement (8"), for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 203.1				
			307	SY	\$ _____ -	\$ _____ -
G9	Remove existing roadway surface, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 203.1				
			4,668	SY	\$ _____ -	\$ _____ -
G10	Barbed wire fence, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #552				
			9,943	LF	\$ _____ -	\$ _____ -
G11	16' gate, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #552				
			11	EA	\$ _____ -	\$ _____ -
G12	20' gate, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #552				
			1	EA	\$ _____ -	\$ _____ -

G13	24' double chain link gate to be approved by NTMWD, complete and in place for the amount of: _____ dollars and _____ cents per each.			1 EA	\$ _____ -	\$ _____ -
G14	Unclassified street excavation as specified in NCTCOG 203.2, for the amount of: _____ dollars and _____ cents per cubic yard.	NCTCOG 203.2		10,374 CY	\$ _____ -	\$ _____ -
G15	Embankment as specified in NCTCOG 203.2, for the amount of: _____ dollars and _____ cents per cubic yard.	NCTCOG 203.2		13,781 CY	\$ _____ -	\$ _____ -
P1	8" lime treated subgrade, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 301.2		18,907 SY	\$ _____ -	\$ _____ -
P2	Lime material (6% ~48 LBS/SY), complete and in place, for the amount of: _____ dollars and _____ cents per TON.	NCTCOG 301.2		454 TON	\$ _____ -	\$ _____ -
P3	6" concrete driveway, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303		577 SY	\$ _____ -	\$ _____ -
P4	3/4" crushed limestone gravel driveway, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 301		516 SY	\$ _____ -	\$ _____ -
P5	8" reinforced concrete pavement, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303		17,781 SY	\$ _____ -	\$ _____ -
P6	25' B-B 8" reinforced concrete pavement w/ curb, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303, 305.1		278 SY	\$ _____ -	\$ _____ -
P7	6" reinforced concrete surface crossing, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 303, 305		120 SY	\$ _____ -	\$ _____ -
P8	8" type C HMA pavement, complete and in place, for the amount of: _____ dollars and _____ cents per TON.	NCTCOG 302		327 TON	\$ _____ -	\$ _____ -
P9	Metal beam guard fence, for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #540		1,090 LF	\$ _____ -	\$ _____ -
P10	Small street sign assembly, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #644		15 EA	\$ _____ -	\$ _____ -
P11	24" (W) stop bar, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668		30 LF	\$ _____ -	\$ _____ -
P12	4" (W) reflective pavement markings, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668		13,669 LF	\$ _____ -	\$ _____ -

P13	4" (Y)(DBL) reflective pavement markings, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #666, #668	6,829	LF	\$ _____ -	\$ _____ -
P14	Raised pavement markings TY A-A, complete and in place for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #666, #668	342	EA	\$ _____ -	\$ _____ -
P15	Metal beam guard fence transition (TL-2), for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #540	4	EA	\$ _____ -	\$ _____ -
P16	Guard rail end treatments, for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #544	4	EA	\$ _____ -	\$ _____ -
P17	4" concrete mow strip, for the amount of: _____ dollars and _____ cents per each.	TxDOT Item #431, #432	476	SY	\$ _____ -	\$ _____ -
D1	18" CLASS III RCP, complete and in place for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 508.3	135	LF	\$ _____ -	\$ _____ -
D2	18" safety end treatment PSET-SC, complete and in place for the amount of: _____ dollars and _____ cents per each.	NCTCOG 508.3, TxDOT Item #467	4	EA	\$ _____ -	\$ _____ -
D3	18" safety end treatment PSET-SP, complete and in place for the amount of: _____ dollars and _____ cents per each.	NCTCOG 508.3, TxDOT Item #467	2	EA	\$ _____ -	\$ _____ -
D4	12" Stone Rip Rap (24" depth), complete and in place for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 808.3, TxDOT Item #432	1,775	SY	\$ _____ -	\$ _____ -
E1	Erosion Control and SWPPP (excluding silt fence) as specified in 202, complete and in place for the amount of: _____ dollars and _____ cents per lump sum.	NCTCOG 202	1	LS	\$ _____ -	\$ _____ -
E2	Installation and maintenance of Silt Fence, as specified herein, complete and in place, for the amount of: _____ dollars and _____ cents per linear foot.	NCTCOG 202.5	13,449	LF	\$ _____ -	\$ _____ -
E3	Block sodding on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.5 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.5, TxDOT Item #162	5,763	SY	\$ _____ -	\$ _____ -
E4	Seeded Curlex on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.6 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.6, TxDOT Item #164	31,053	SY	\$ _____ -	\$ _____ -
E5	Hydromulch on all areas of non-farmland disturbed during the project, to be applied in the specified manner, and methods to comply with NCTCOG section 204.6 complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	NCTCOG 204.6, TxDOT Item #164	16,067	SY	\$ _____ -	\$ _____ -

6005	Cement stabilized backfill, complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #400	73	CY	\$ -	\$ -
6004	Drill Shaft (36") complete and in place, for the amount of: _____ dollars and _____ cents per linear foot.	TxDOT Item #416	2,922	LF	\$ -	\$ -
6013	Class C concrete (abutment), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420	41	CY	\$ -	\$ -
6029	Class C concrete (cap), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420	258	CY	\$ -	\$ -
6037	Class C concrete (column), complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #420	143	CY	\$ -	\$ -
6023	Shear key, complete and in place, for the amount of: _____ dollars and _____ cents per cubic yard.	TxDOT Item #422	13	CY	\$ -	\$ -
6001	Reinforced concrete slab, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #422	51,680	SF	\$ -	\$ -
6015	Approach slab, complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #422	62	CY	\$ -	\$ -
6036	Prestressed concrete girder (TX34), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #425	6,042	LF	\$ -	\$ -
6023	Rail (TY SSTR) (SLOTTED), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #450	3,076	LF	\$ -	\$ -
6018	Sealed expansion joint (SEJ-M) (4 IN), complete and in place, for the amount of: _____ dollars and _____ cents per square yard.	TxDOT Item #454	262	LF	\$ -	\$ -

TOTAL BID: \$ _____

Summary of Changes via Addendum

Summary of changes:

1. Section E - Bid Proposal Form

- a. Item G8
 - i. Description updated to include 8" thickness in response to contractor question.
- b. Item G9
 - i. Description and quantity corrected to be "Remove existing roadway surface" and "4668 SY" as shown on civil plan sheets C-5 and C-7.
- c. Item G14
 - i. Quantity updated to 10,374 CY.
- d. Item G15
 - i. Quantity updated to 13,781 CY.
- e. Item P14
 - i. Quantity and measurement for Raised Pavement Markings TY A-A updated to "342 EA."
- f. Item P15
 - i. Item added for metal beam guard fence transitions (TL-2). 4 EA.
- g. Item P16
 - i. Item added for guard rail end treatments. 4 EA.
- h. Item P17
 - i. Item added for 4" concrete mow strip. 476 SY.
- i. Item 6018
 - i. Quantity updated to 262 LF to account for missing SEJ-M at Abut 20 shown on bridge plan sheet B-4.

2. Civil Plan Sheets

- a. Sheet C-3
 - i. Summary of quantity items updated to match changes in Bid Proposal Form.
- b. Sheet B-4
 - i. SEJ-M added at Abut. 20.

3. Bid Proposal form provided in Excel Format in response to contractor request.